


TCG005 AD-MDT

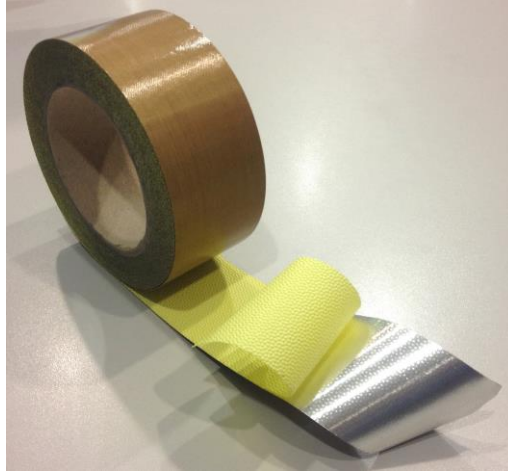

Product	Product category	Coating
PTFE GLASS FABRIC SELF ADHESIVE	ADHESIVE TAPE SERIES	SILICONE PSA

TCG005AD-MDT metal detectable tape features a PTFE/glass backing with Alu foil and a pressure sensitive silicone adhesive cover with yellow protective liner. The PTFE/glass is ideal for non-stick surface applications on heat sealing machines, form seal equipment, blister packaging. Other release applications could be as chutes, dead plates or conveyor rails. The alu foil is perfect for being identified by metal detector equipment should the tape become worn or fall from its work surface. A silicone adhesive backing applied to the Alu foil allows for reliable bonding to the work area.

Properties	Value	Unit
Thickness	0.20	mm
Weight	305	gr/m ²
Adhesion	6.00	N/cm
Temperature resistance	-73 / +260	°C

Note: Nominal thickness, weight and adhesion values are typical and are not intended as a specification minimum.
Weight Tolerance g/m² = ±%5

All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained here in are based on test results GORTEF believes to be reliable, but they are not to be construed in any manner as warranties expressed.
All data is subject to change without notice.



GORTEF HIGH PERFORMANCE PTFE

UNIT 35, LEVEL 2,
42-46 Wattle Road,
Brookvale, Sydney,
NSW, Australia ,2100.

TEL : +61 2 9938 4493
FAX : +61 2 9938 4496

www.gortef.com
info@gortef.com