


GORTEF HIGH PERFORMANCE PTFE

PRODUCT SPECIFICATION

GORTEF-LAM RT 238

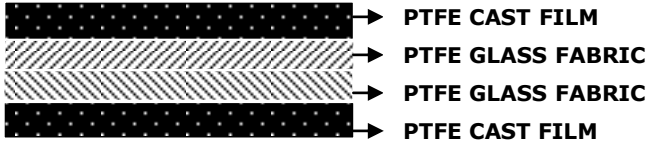

Product	Product category	Lamination
PTFE CAST FILM LAMINATED GLASS FABRIC	GORTEF-LAM SERIES	MULTILAYER PTFE CAST FILM

GORTEFLAM RT238 laminated product features multi-layer PTFE cast film laminated on both sides of a 2 ply laminated PTFE / glass fabric, uniform thickness, crack and pinhole free surface.

FDA Compliant

Suitable for use in direct food contact applications under the applicable requirements of, 21CFR 177.1550

Applications: Flour tortilla machine conveyor belts.

Properties	Value	Unit
Standard width(s) <i>Please ask for other widths</i>	1200	mm
Thickness	0.21	mm
Weight	450	gr/m ²
PTFE content	77	%
Tensile strength	2000	N/5 cm
Temperature resistance	-150 /+260	°C

Note: Nominal thickness, weight and tensile strength values are typical and are not intended as a specification minimum.
Weight Tolerance g/m² = ±5%

All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained here in are based on test results FIBERFLON believes to be reliable, but they are not to be construed in any manner as warranties expressed.
All data is subject to change without notice.



GORTEF HIGH PERFORMANCE PTFE

UNIT 35, LEVEL 2,
42-46 Wattle Road,
Brookvale, Sydney,
NSW, Australia ,2100.

TEL : +61 2 9938 4493
FAX : +61 2 9938 4496

www.gortef.com
info@gortef.com